




CER-OTS50-P POWER TRANSFORMER

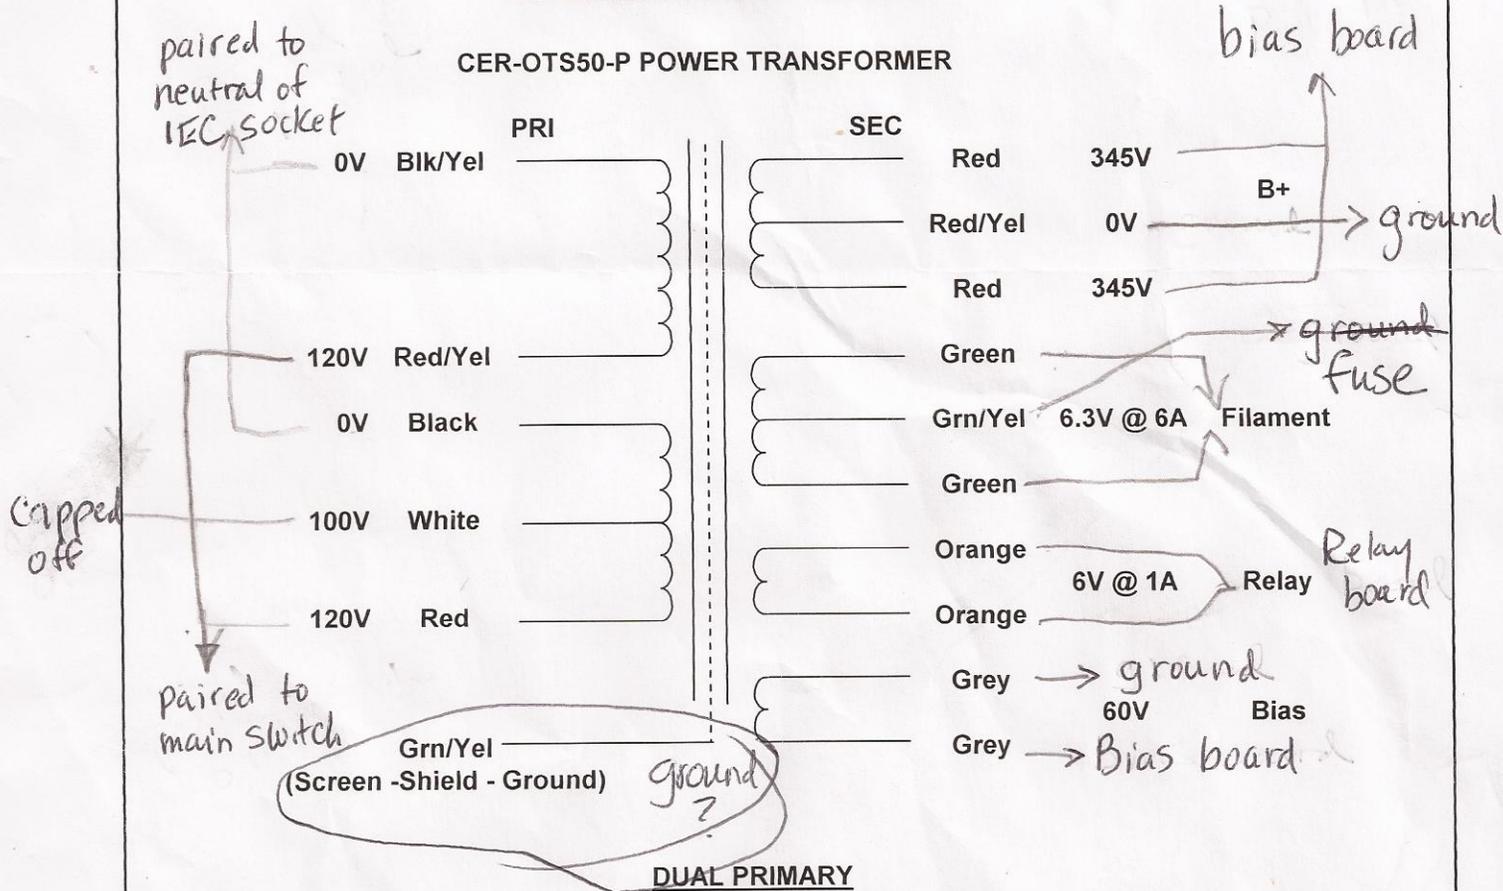

On a dual primary PT, BOTH primary windings MUST be used!

For 120V use, tie Black & Blk/Yel together and tie Red and Red/Yel together. These are your 2 leads.
 Float (cap off) the White wire.

For 100V use, tie Black & Blk/Yel together and tie Red and Red/Yel together.
 Float and cap off the Red and Red/Yel leads.

The two leads you use are the White wire and the tied together Black and Blk/Yel wires.

For 220V use, tie Red/Yel and Black together and float them.
 Use Blk/Yel and White wires as your 2 leads.
 Float (cap off) the Red wire

For 230V-240V use, tie Red/Yel and Black together and float them.
 Use Blk/Yel and Red wires as your 2 leads.
 Float (cap off) the White wire